

# 5.25 in (133mm) Bottom w/ 5 in (127mm) 5-6 Lobe 4.0 Stage HR MUD LUBE




|  |                                       |                  |
|--|---------------------------------------|------------------|
| <b>Bit Size Range</b>                      | 6-1/4 - 7-7/8 in                      | 159 - 200 mm     |
| <b>Bit Box Connection</b>                  | 3-1/2 REGULAR                         |                  |
| <b>Dynamic Bearing Load On/Off Bottom</b>  | 60730 lbf                             | 27000 daN        |
| <b>Static Bearing Load On/Off Bottom</b>   | 124336 lbf                            | 55300 daN        |
| <b>Max. Overpull (For Re-run)</b>          | 231000 lbf                            | 102800 daN       |
| <b>Absolute Overpull</b>                   | 462000 lbf                            | 205500 daN       |
| <b>Adjustable Makeup Torque</b>            | 13000 ft-lbs                          | 17600 Nm         |
| <b>Stab/Thread Protector Makeup Torque</b> | 8500 ft-lbs                           | 11500 Nm         |
| <b>A = Bit to Stabilizer (Centre)</b>      | 15.74 in                              | 0.4 m            |
| <b>B = Bit to Bend</b>                     | Adjustable: 57.5 in<br>Fixed: 46.6 in | 1.46 m<br>1.18 m |
| <b>C = Overall (With Dump Sub)</b>         | 257 in                                | 6.53 m           |
| <b>Weight</b>                              | 1061 lb                               | 481 kg           |

|                                      |                       |            |
|--------------------------------------|-----------------------|------------|
| <b>Lobe Configuration</b>            | 5-6 Lobe 4.0 Stage HR |            |
| <b>Displacement (No Load)</b>        | 1.03 rev/gal          | 0.27 rev/l |
| <b>Max. Differential (Full Load)</b> | 621 psi               | 4282 kPa   |
| <b>Max. Torque</b>                   | 1656 ft-lbs           | 2245 Nm    |
| <b>Max. Power</b>                    | 71 HP                 | 53 kW      |

| Flow Rate |     | Speed     |
|-----------|-----|-----------|
| GPM       | LPM | RPM       |
| 100       | 379 | 70 - 103  |
| 175       | 662 | 148 - 181 |
| 250       | 946 | 225 - 258 |

5 in (127mm) 5-6 Lobe 4.0 Stage HR

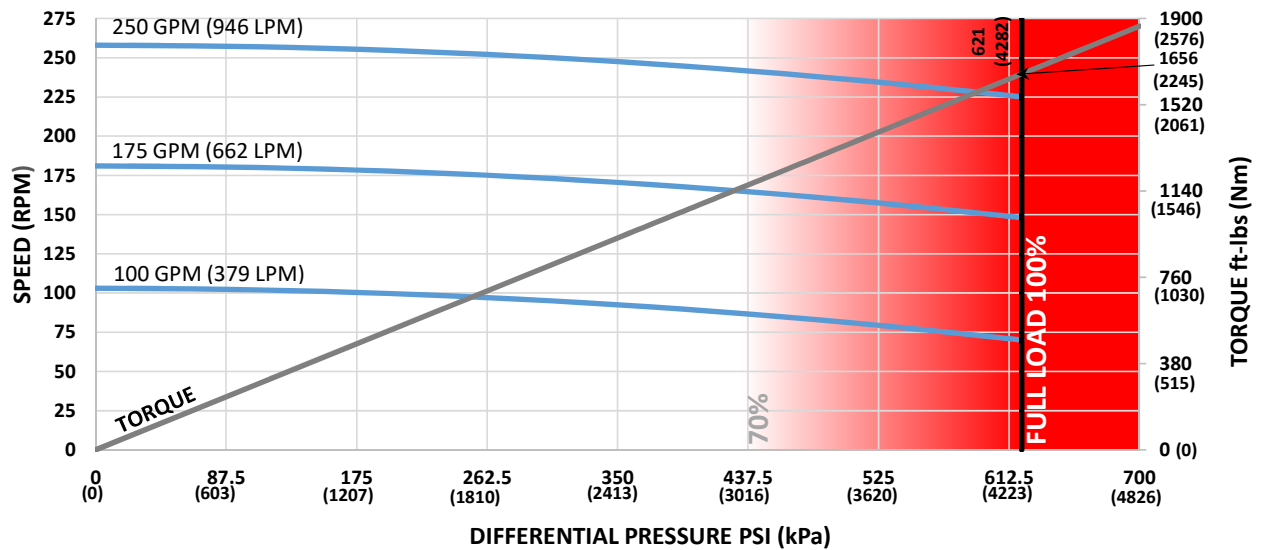

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE

| Hole Size         | SLICK                      |               |               |               | STABILIZED                 |               |               |               |
|-------------------|----------------------------|---------------|---------------|---------------|----------------------------|---------------|---------------|---------------|
|                   | 6-1/4 (159mm)              | 6-3/4 (171mm) | 7-1/4 (184mm) | 7-7/8 (200mm) | 6-1/4 (159mm)              | 6-3/4 (171mm) | 7-1/4 (184mm) | 7-7/8 (200mm) |
| <b>BEND ANGLE</b> | Degrees per 100 Feet (30m) |               |               |               | Degrees per 100 Feet (30m) |               |               |               |
| 0.39              | 1.5                        | -             | -             | -             | 2.8                        | 3.5           | 4.2           | -             |
| 0.78              | 5.4                        | 3.3           | 1.2           | -             | 6.0                        | 6.7           | 7.3           | 8.2           |
| 1.15              | 9.1                        | 7.0           | 4.9           | 2.2           | 9.1                        | 9.6           | 10.3          | 11.1          |
| 1.50              | 12.7                       | 10.5          | 8.4           | 5.7           | 12.7                       | 12.5          | 13.1          | 14.0          |
| 1.83              | 16.0                       | 13.8          | 11.7          | 9.0           | 16.0                       | 15.1          | 15.8          | 16.6          |
| 2.12              | 18.9                       | 16.7          | 14.6          | 11.9          | 18.9                       | 17.5          | 18.1          | 19.0          |
| 2.38              | 21.5                       | 19.3          | 17.2          | 14.5          | 21.5                       | 19.6          | 20.2          | 21.1          |
| 2.60              | 23.7                       | 21.5          | 19.4          | 16.7          | 23.7                       | 21.5          | 22.0          | 22.9          |
| 2.77              | 25.4                       | 23.2          | 21.1          | 18.4          | 25.4                       | 23.2          | 23.4          | 24.2          |
| 2.90              | 26.7                       | 24.6          | 22.4          | 19.7          | 26.7                       | 24.6          | 24.4          | 25.3          |
| 2.97              | 27.4                       | 25.3          | 23.1          | 20.4          | 27.4                       | 25.3          | 25.0          | 25.8          |
| 3.00              | 27.7                       | 25.6          | 23.4          | 20.7          | 27.7                       | 25.6          | 25.2          | 26.1          |

Note: Stabilizers are 1/8" undergauge

FBH BUILD RATE


| Hole Size         | SLICK                      |               |               |               | STABILIZED                 |               |               |               |
|-------------------|----------------------------|---------------|---------------|---------------|----------------------------|---------------|---------------|---------------|
|                   | 6-1/4 (159mm)              | 6-3/4 (171mm) | 7-1/4 (184mm) | 7-7/8 (200mm) | 6-1/4 (159mm)              | 6-3/4 (171mm) | 7-1/4 (184mm) | 7-7/8 (200mm) |
| <b>BEND ANGLE</b> | Degrees per 100 Feet (30m) |               |               |               | Degrees per 100 Feet (30m) |               |               |               |
| 1.25              | 9.6                        | 7.0           | 4.4           | 1.2           | 10.4                       | 11.1          | 11.8          | 12.6          |
| 1.50              | 12.1                       | 9.5           | 6.9           | 3.7           | 12.6                       | 13.2          | 13.9          | 14.7          |
| 1.75              | 14.6                       | 12.0          | 9.4           | 6.2           | 14.7                       | 15.4          | 16.0          | 16.9          |
| 2.00              | 17.1                       | 14.5          | 12.0          | 8.8           | 17.1                       | 17.5          | 18.2          | 19.0          |
| 2.25              | 19.6                       | 17.0          | 14.5          | 11.3          | 19.6                       | 19.7          | 20.3          | 21.2          |
| 2.50              | 22.1                       | 19.5          | 17.0          | 13.8          | 22.1                       | 21.8          | 22.5          | 23.3          |

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.


For custom motor configurations and build rates, please contact your DYNOMAX office.

**FISHING DIMENSIONS**

USC - IMPERIAL (Lengths, Diameters = in)  
SI - METRIC (Lengths = m, Diameters = mm)

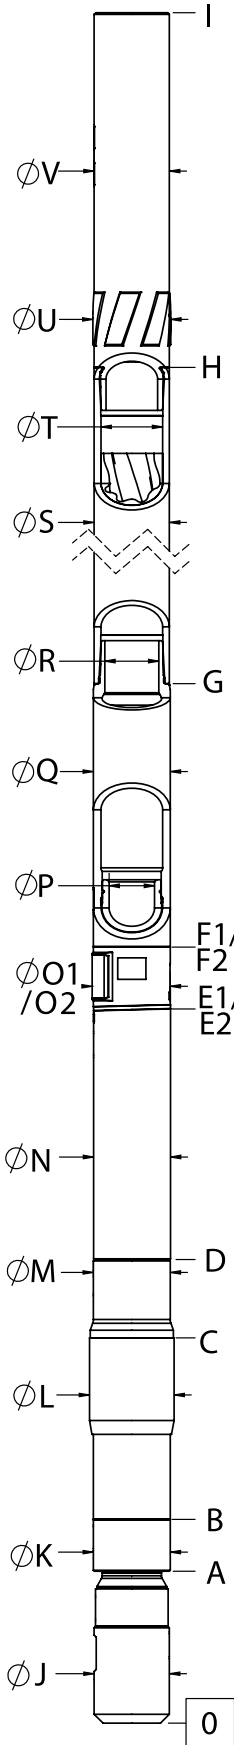

| EXTERNALS                       |    | USC   | SI    |
|---------------------------------|----|-------|-------|
| LOWER HSG FLOW REST.            | A  | 12.3  | 0.31  |
| BEARING HOUSING START           | B  | 16.0  | 0.41  |
| STABILIZER SHOULDER             | C  | 27.0  | 0.69  |
| BEARING HOUSING END             | D  | 37.8  | 0.96  |
| BIT TO BEND (ADJUSTABLE)        | E1 | 57.5  | 1.46  |
| ADAPTOR HOUSING (ADJUSTABLE)    | F1 | 62.0  | 1.57  |
| BIT TO BEND (FIXED)             | E2 | 46.6  | 1.18  |
| ADAPTOR HSG (FIXED)             | F2 | 55.9  | 1.42  |
| STATOR START                    | G  | 85.9  | 2.18  |
| STATOR END                      | H  | 225.9 | 5.74  |
| OVERALL LENGTH                  | I  | 257.0 | 6.53  |
| BIT BOX Ø                       | J  | 5.15  | 130.8 |
| LOWER HOUSING FLOW RESTRICTOR Ø | K  | 5.25  | 133.4 |
| THREAD PROTECTOR Ø              | L  | 6.00  | 152.4 |
| BEARING HOUSING Ø               | M  | 5.25  | 133.4 |
| KICK OR FIXED HSG Ø             | N  | 5.25  | 133.4 |
| KICK PAD Ø (ADJUSTABLE)         | O1 | 5.57  | 141.5 |
| KICK PAD Ø (FIXED)              | O2 | 5.57  | 141.5 |
| ADJ MANDREL PIN Ø               | P  | 3.15  | 80.0  |
| ADAPTOR HOUSING Ø               | Q  | 5.25  | 133.4 |
| ADAPTOR HOUSING PIN Ø           | R  | 3.35  | 85.1  |
| STATOR TUBE OUTER Ø             | S  | 5.00  | 127.0 |
| STATOR TUBE INNER Ø             | T  | 3.75  | 95.3  |
| ROTOR CATCH SUB BLADE Ø         | U  | 5.25  | 133.4 |
| ROTOR CATCH Ø                   | V  | 5.00  | 127.0 |

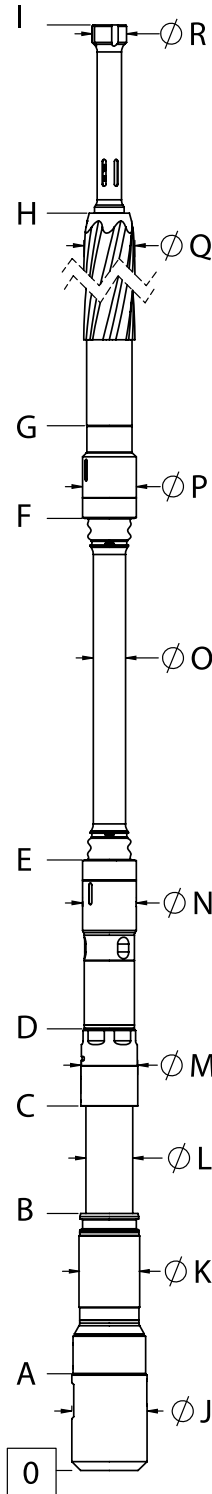

| INTERNALS                            |   | USC   | SI    |
|--------------------------------------|---|-------|-------|
| BIT BOX                              | A | 9.0   | 0.23  |
| LOWER SHAFT FLOW RESTRICTOR DIAMETER | B | 20.1  | 0.51  |
| COMPRESSION NUT                      | C | 28.6  | 0.73  |
| BEARING ASSEMBLY ADAPTOR             | D | 35.9  | 0.91  |
| BAA ADAPTOR CAP                      | E | 48.3  | 1.23  |
| ROTOR ADAPTOR CAP                    | F | 79.9  | 2.03  |
| ROTOR START                          | G | 86.0  | 2.18  |
| ROTOR                                | H | 221.5 | 5.63  |
| CATCH STEM                           | I | 233.4 | 5.93  |
| BIT BOX Ø                            | J | 5.15  | 130.8 |
| FLOW RESTRICTOR Ø                    | K | 3.95  | 100.3 |
| MANDREL Ø                            | L | 3.22  | 81.8  |
| COMPRESSION NUT Ø                    | M | 3.89  | 98.8  |
| BEARING ASSEMBLY ADAPTOR Ø           | N | 4.05  | 102.9 |
| DRIVESHAFT Ø                         | O | 2.16  | 54.9  |
| ROTOR ADAPTOR Ø                      | P | 3.90  | 99.1  |
| ROTOR MAJOR Ø                        | Q | 3.00  | 76.2  |
| ROTOR CATCH HEAD Ø                   | R | 2.13  | 54.0  |

This information is for reference only. Assemblies are displayed in an "Adjustable Configuration"

Rotor Catch and Rotor Catch Float Sub Lengths may vary based on configuration, and use of Dump Subs or combination Rotor Catch and Float Housings.

If any additional information is required, please contact your local DYNOMAX office.